



INCLUDES

Combination valve

UNIQUE FEATURES

• Direct venting to specified location

REASONS TO CHOOSE

- Proven performance
- Long-lasting durability
- Alternate venting option
- · Provides baffled vent
- · Air management options
- For use on plastic or metal reservoirs



Revised 7/25

Disclaimer: At Kelch, we make quality products. We do not know how you will use our product. You, the customer, are in the best position to know the uses and conditions to which our products will be subjected and to know how our product will perform in your application.

You are responsible for identifying and performing tests necessary to assure that our product is safe and suitable for the application you have choosen. We ask that you hold us harmless from any claims that result from our product being used in an unsafe or unsuitable way.









COMPOSITION

• Engineered thermoplastics

VENTING OPTIONS

- Open vent
- · Combination valve

MOUNTING

- Push-in grommet
- Request Kelch print #6637 for recommended hole size and wall thickness speci cation

MATERIAL OPTIONS

- Nylon 6
- Flame Retardant


GROMMET OPTIONS (SOLD SEPARATELY)

- Nitrile pt. #203403
- FKM pt. #203535

BARB OPTIONS

- 3/16" barb
- 1/4" barb
- 5/16" barb

CROSS SECTION VIEW

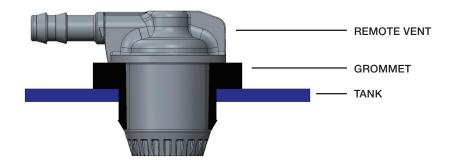

Revised 7/25

Disclaimer: At Kelch, we make quality products. We do not know how you will use our product. You, the customer, are in the best position to know the uses and conditions to which our products will be subjected and to know how our product will perform in your application.

You are responsible for identifying and performing tests necessary to assure that our product is safe and suitable for the application you have choosen. We ask that you hold us harmless from any claims that result from our product being used in an unsafe or unsuitable way.

